



KONE DESTINATION SIGNALIZATION

KSS 800 and KSS 900

KSS 800 SERIES SIGNALIZATION FOR ELEVATORS WITH KONE DESTINATION

Stainless steel finishing

DESTINATION OPERATING PANEL (DOP)

Surface mounted (on wall)



KSP 833

ELEVATOR IDENTIFIER (EID)



KST 830
Passive



KST 840
Active

JAMB-MOUNTED DESTINATION INDICATOR (JM DIN)*



KSJ 853



33 mm
(width)



KSJ 863



50 mm
(width)

* Available only with traditional configuration

CAR OPERATING PANEL (COP)
KONE Destination with traditional configuration




KSC 843
Full height*

KSC 833
Full height**


CAR OPERATING PANEL (COP)
KONE Destination with hybrid configuration

All KDS 300 signalization components are available in flush-mounted applications.

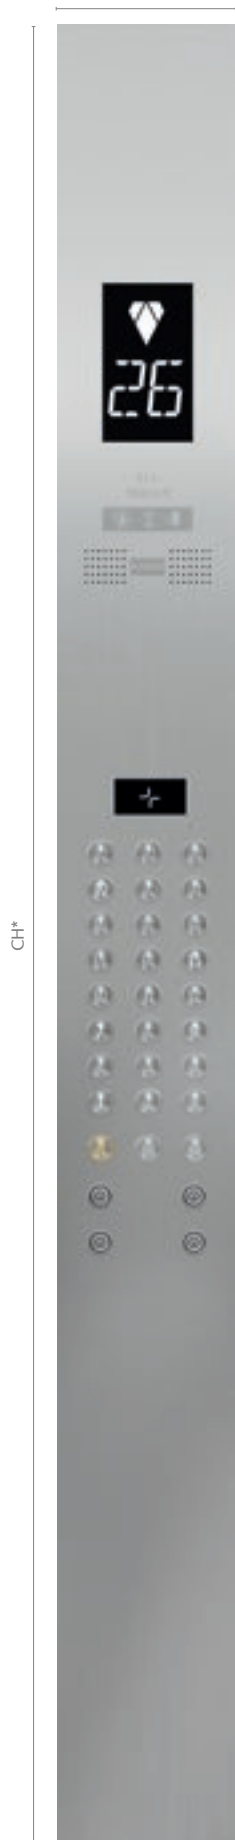


Full height


HALL INDICATOR (HI)

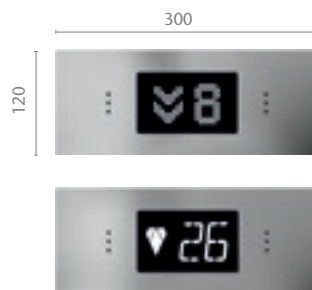

HALL LANTERN (HL)

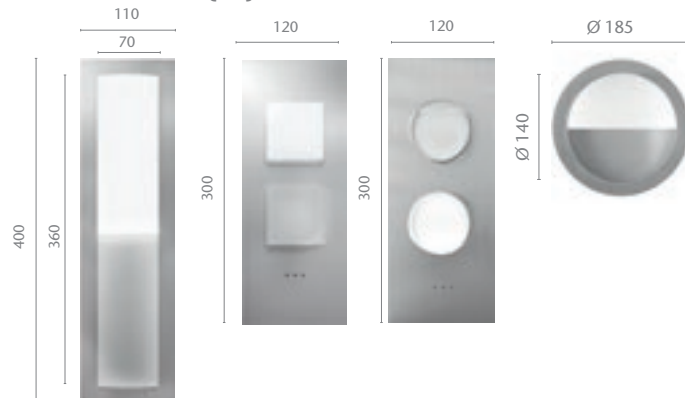

LANDING CALL STATION (LCS)

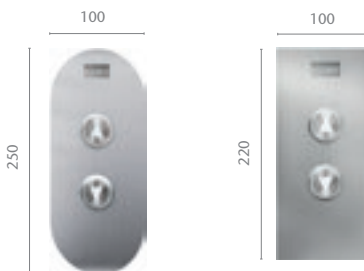

LANDING CALL STATION WITH INDICATOR (LCI)



Simplex

Duplex

Note: These are recommended signalization components for hybrid configurations. For the full KDS 300 offering, please refer to the KDS 300 brochure.

*The exact height of the COP depends on the car height and the selected ceiling option.

** Available only with traditional configuration in 4 color options: copper satin, dark grey brushed, silver mirrorpolished, silver

KSS 800 SERIES SIGNALIZATION FOR ELEVATORS WITH KONE DESTINATION

Design series


TOUCHSCREEN DESTINATION OPERATING PANEL (DOP)




KSP 858 also available with pedestal

DESTINATION OPERATING PANEL (DOP)

Surface mounted (on wall)

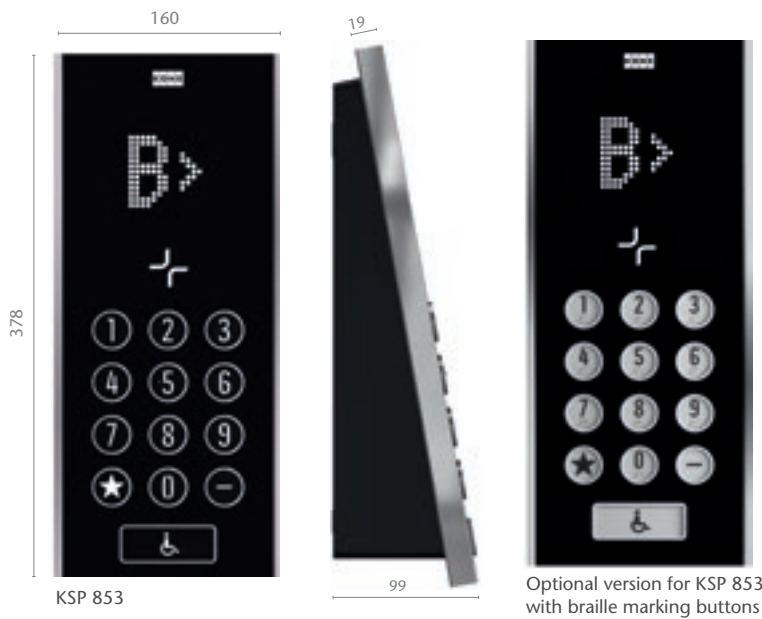

ELEVATOR IDENTIFIER (EID)

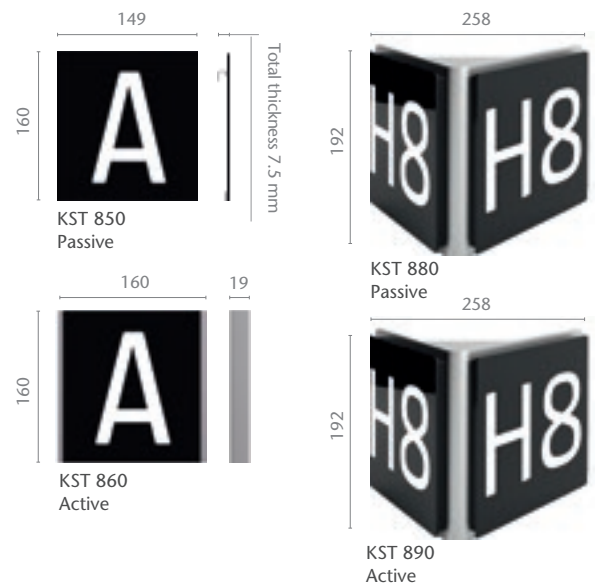


JAMB-MOUNTED DESTINATION INDICATOR (JM DIN)*



* Available only with traditional configuration

CAR OPERATING PANEL (COP)
KONE Destination with traditional configuration

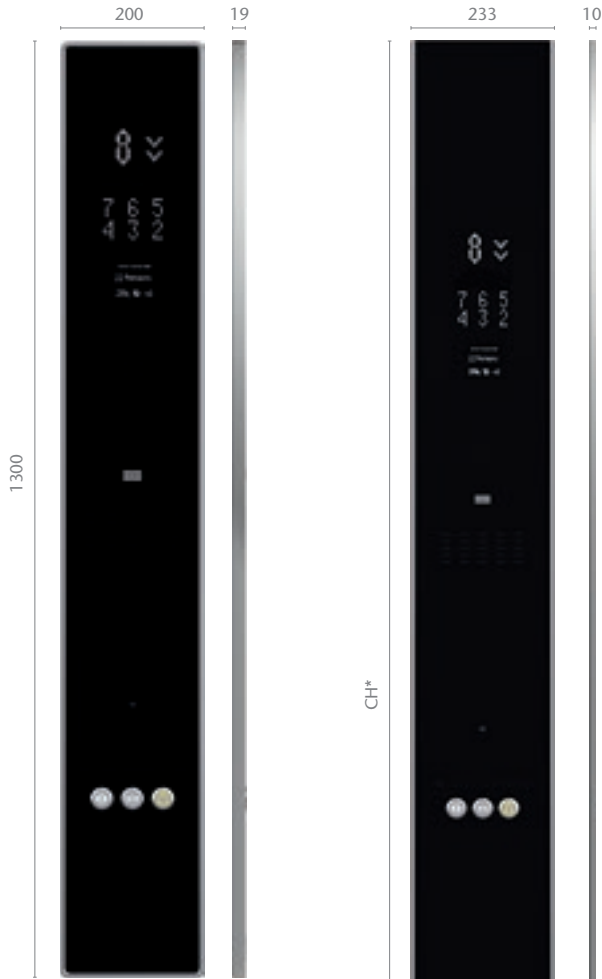


KSC 853
Partial height

KSC 863
Full height

*** Note:**
The exact height of the COP depends on the car height and the selected ceiling option.

CAR OPERATING PANEL (COP)
KONE Destination with hybrid configuration

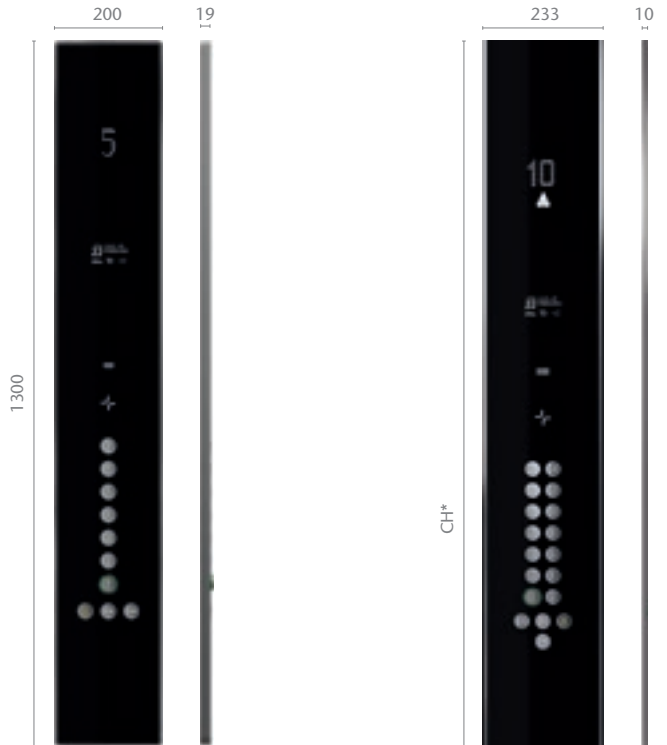

Partial height
(scrolling dot-matrix)¹

Full height
(scrolling dot-matrix)¹

*** Note:**
These are the recommended signalization components for hybrid configurations. For the full KSS D offering, please refer to the KSS D brochure (KONE Design signalization).

For the KONE Access™ solution note:

- ¹) KONE Access™ can be integrated inside the KSC D23 and KSC D43 car operating panels only.
- ²) Only available with scrolling dot-matrix display.

HALL LANTERN (HL)



KSH D20

HALL INDICATOR (HI)




KSI D42 Horizontal or vertical
(dot-matrix)²

DESTINATION INDICATOR AT LANDING (DIN L)




KSO 857
Natural color anodized



KSO 857
Black color anodized

LANDING CALL STATION WITH INDICATOR (LCI)

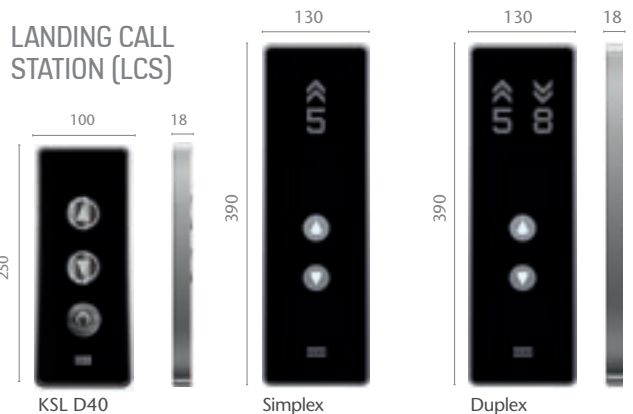

KSL D40

Simplex

Duplex

KSS 900 SERIES SIGNALIZATION FOR ELEVATORS WITH KONE DESTINATION

DESTINATION OPERATING PANEL (DOP)


Surface mounted (on wall or on pedestal)



KSP 937

Also available with square buttons (see below)

ELEVATOR IDENTIFIER (EID)



KST 950

Available in active and passive configurations


FLUSH MOUNTED (ON WALL)



KSP 947

Also available with round buttons (see above)

DESTINATION INDICATOR AT LANDING (DIN L)

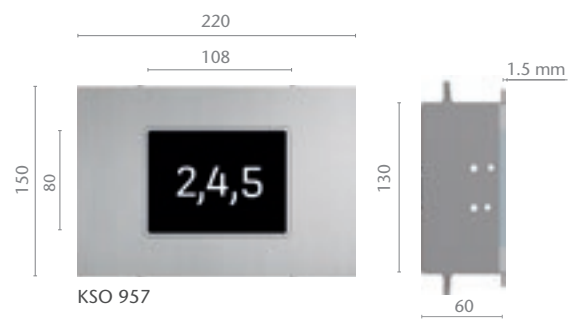

KSO 957

CAR OPERATING PANEL (COP)

KONE Destination with traditional configuration



KSC 957**
Full height

CAR OPERATING PANEL (COP)

KONE Destination with hybrid configuration



KSC 977
Full height


HALL LANTERN (HL)



KSH 660




KSH 670¹⁾



KSH 940



KSH 950




KSH 960

KSC 957


↑
Last digit defines the display type

5 = black and white LCD
7 = full-color LCD

HALL INDICATOR (HI)




KSI 673, 675¹⁾



KSI 983




KSI 977



KSI 987

HALL INDICATOR WITH LANTERN ARROWS



KSA 673¹⁾

¹⁾ Also available in vertical configuration.

LANDING CALL STATION (LCS)




KSL 670



KSL 672
Simplex



KSL 672
Duplex



KSL 970
Flush button

* **Note:**
The exact height of the COP depends on the car height and the selected ceiling option.

** KSC 955 also available with black and white display.

Back box width in all landing call stations is 65 mm.

KONE provides innovative and eco-efficient solutions for elevators, escalators, automatic building doors and the systems that integrate them with today's intelligent buildings.

We support our customers every step of the way; from design, manufacturing and installation to maintenance and modernization. KONE is a global leader in helping our customers manage the smooth flow of people and goods throughout their buildings.

Our commitment to customers is present in all KONE solutions. This makes us a reliable partner throughout the life cycle of the building. We challenge the conventional wisdom of the industry. We are fast, flexible, and we have a well-deserved reputation as a technology leader, with such innovations as KONE MonoSpace®, KONE NanoSpace™ and KONE UltraRope®.

KONE employs close to 50,000 dedicated experts to serve you globally and locally.

KONE CORPORATION

Head office

Kartanontie 1
P.O. Box 8
FI-00331 Helsinki
Finland
Tel. +358 (0)204 751

Corporate offices

Keilasatama 3
P.O. Box 7
FI-02151 Espoo
Finland
Tel. +358 (0)204 751

www.kone.com